

VINYL APPLICATION

Vinyl die-cut letters are pre-spaced between two carrier sheets.

DO NOT REMOVE THESE CARRIERS.


The white semi-transparent carrier paper should be face up.

Squeegee all legends before application to insure proper release of letters.


- Your copy is partially visible through the top white carrier sheet, allowing you to position the copy as it will appear in its final state, making sure it is straight and level. Use the bottom or top of any straight letters as a guide to level your legend. Do not rely on the carrier sheets. Mount the legend to the desired surface with masking tape along the top edge to serve as a hinge.
- Remove the back liner, being careful not to allow the pressure sensitive letter backs to touch any surface.
- Using a downward motion, away from the tape hinge, burnish or squeegee the top carrier sheet onto the surface.
- After legends are squeegeed firmly onto the surface, remove the masking tape and white top carrier sheet by rolling it back carefully against itself.
- Should you have any air bubbles, puncture them with a fine needle or x-acto blade, and burnish flat using an overlay sheet to protect the letter while burnishing.



align, position both carrier sheets with masking tape

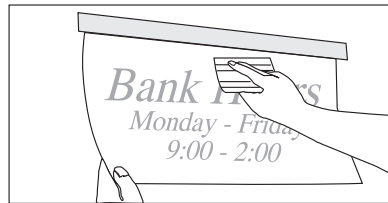

remove back liner, hold top carrier sheet away from surface, squeegee letters down

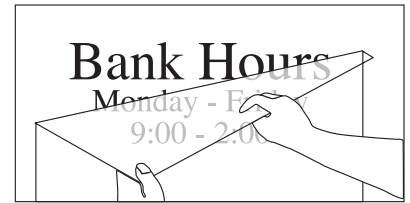

remove masking tape, peel back top carrier sheet

Helpful Hints

The surface must be clean and free of dirt, grease and wax.

Newly painted surfaces must be aged at least 36 hours.

Vinyl letters will not adhere to some plastic laminates and surfaces which contain silicone or have been cleaned, coated or treated with any solution containing silicone.

Vinyl letters will not adhere to porous surfaces such as concrete, unpainted wood and some vinyl wall coverings.

ALWAYS PRE-TEST APPLICATION TO THE SURFACE PRIOR TO ORDERING.

QUESTIONS?

Please call Acorn Sign Graphics at 804-726-6999 / 800-770-4744

acornsign.com

P.O. Box 11664
4109 West Clay Street / Richmond, VA 23230
tel - 804.726.6999 / fax - 804.726.6998
toll free - 800.770.4744



**ACORN
SIGN
GRAPHICS**